


eT3io V1

Spec Sheet

1.000 x 1.000 mm

+/- 15° CURVING IN 2,5° STEPS
40% TRANSPARENT
CARBONSHADER
FAST REPLACEABLE BACKBOX

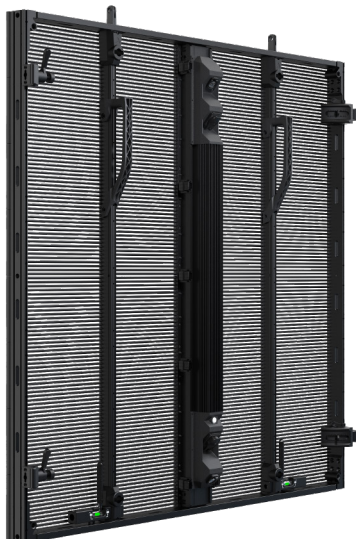

Pixelpitch	3,90 mm / 7,80 mm H/V
Brightness	≥ 4.200 nits
Weight	16,8 kg
Power Consumption	Nominal 146 W max. 510 W
SMD-Type	Sinyopto 1921
SMD Specifications	Matt-Face, High-Level
Color Depth	Up to 16 Bit
Resolution	256 x 128 px
LED Driver	ICND2153AN
Receivingcard	Novastar A10s Pro
Scanmode	1/8
Refreshrate	≥ 3.840 Hz
Horiz. Angle of View	+160° -160°
Vert. Angle of View	+140° -140°
Contrast	> 1.000:1
Voltage Range	AC 88-264V 50-60 Hz
Connection	Neutrik powerCON TRUE1 TOP
Dimensions (BxHxT)	1.000 x 1.000 x 88 mm
IP Rating	IP 65 Front IP54 Back
Temperature Rating	-30°C to +45°C (In Operation) -10°C to +55°C (Storing)
Highlights	+/-15° curving in 2,5° steps, 40% Transparent, Carbonshader

Certification

UL CE  RoHS EMC

Stand: 08/2023