

uR1 V1

Spec sheet

500 x 500 mm

500X500 FRAME


TOP-LEVEL LED

BLACK-FACE LED

URT

INDOOR/OUTDOOR

-10° CURVING IN 2,5° STEPS

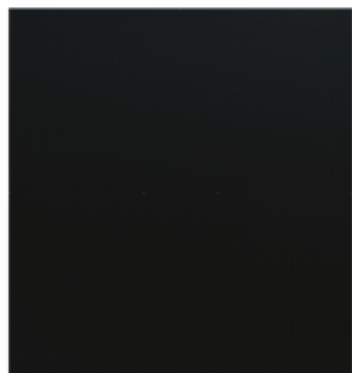

Pixelpitch	1,95mm
Brightness	3.500 nits
Weight	9,2 kg
Power Consumption	Nominal 50W max. 200 W
SMD-Type	SMD
SMD Specifications	Black Face, High-Level, CCT, Flip-Chip
Color Depth	Up to 16 Bit
Resolution	256 x 256 px
LED Driver	CFD955
Receivingcard	Novastar 10s Pro
Scanmode	1/16
Refreshrate	≥ 3.840 Hz
Horiz. Angle of View	+140° -140°
Vert. Angle of View	+140 -140°
Contrast	6.000:1
Voltage Range	AC 88-264V 50-60 Hz
Connection	Neutrik powerCON True1 TOP
Dimensions (BxHxT)	500 x 500 x 55 mm
IP Rating	IP 65 Front IP 54 Back
Temperature Rating	-30°C to +45°C (In Operating) -10°C to +55°C (Storing)
Highlights	Significantly fewer mechanical damages due to specially sealed modules (URT), -10° curving in 2,5° steps
Certification	