


vP2+B V3

Spec Sheet

500 x 500 mm

BROMPTON R2 RECEIVINGCARD
COLOR MATCHING TOOL
1-6° CONCAVE
HIGH-LEVEL
BLACK-FACE
QUICK-LOCK-SYSTEM
MAGNETIC FAST-RIGG
FAST REPLACEABLE BACKBOX

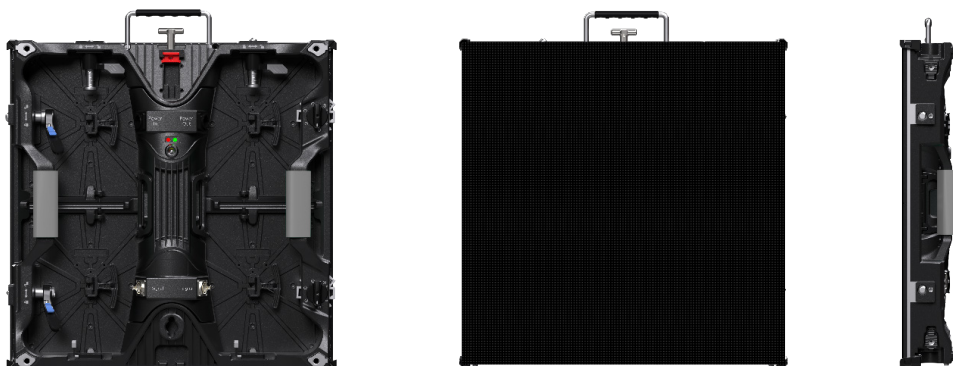

Pixelpitch	2,60 mm
Brightness	≥ 1.600 nits
Weight	8,5 kg
Power Consumption	Nominal 44 W max. 130 W
SMD-Type	Nationstar BF1515 GW
SMD Specifications	Black-Face, High-Level
Color Depth	Up to 16 Bit
Resolution	192 x 192 px
LED Driver	MBI5264
Receivingcard	Brompton R2
Scanmode	1/24
Refreshrate	≥ 3.840 Hz
Horiz. Angle of View	+140° -140°
Vert. Angle of View	+140° -140°
Contrast	> 5.500:1
Voltage Range	AC 88-264V 50-60 Hz
Connection	Neutrik powerCON TRUE1 TOP
Dimensions (BxHxT)	500 x 500 mm T = 80 mm
IP Rating	IP 40 Front & Back
Temperature Rating	-30°C to +45°C (In Operation) -10°C to +55°C (Storing)
Highlights	1-6° concave installation, Color Matching Tool, Magnetic Fast-Rigg, Fast Replacable Backbox

Certification

UL CE  RoHS EMC

Stand: 08/2023