
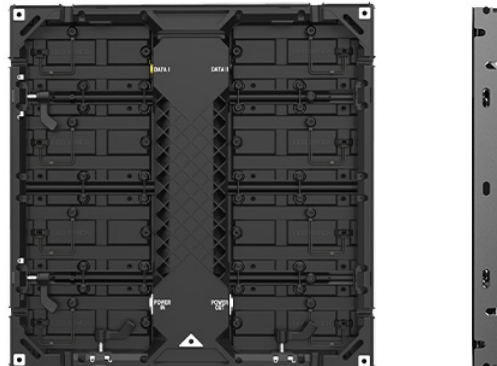


LB2.6

Spec Sheet

500 x 500 mm

NOVASTAR A5S+ RECEIVINGCARD
QUICK-LOCK-SYSTEM
MAGNETIC FAST-RIGG
100% FRONTSERVICE

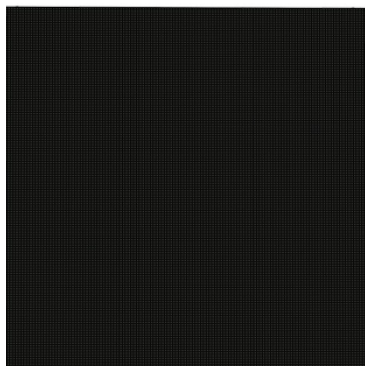

Pixelpitch	2,60 mm
Brightness	≥ 1.100 nits
Weight	5,4 kg
Power Consumption	Nominal 34 W max. 150 W
SMD-Type	SMD
SMD Specifications	High-Level, Black-Face
Color Depth	15 Bit
Resolution	192 x 192 px
LED Driver	ICND2153S
Receivingcard	Novastar A5s+
Scanmode	1/24
Refreshrate	≥ 3.840 Hz
Horiz. Angle of View	+160° -160°
Vert. Angle of View	+140° -140°
Contrast	> 7.600:1
Voltage Range	AC 100-240V 50 Hz
Connection	Seetronic Blau/Weiß
Dimensions (BxHxT)	500 x 500 x 40 mm
IP Rating	IP 40
Temperature Rating	-15°C to +40°C (In Operating) -20°C to +45°C (Storing)
Highlights	Quick-Lock-System, Magnetic Fast-Rigg, 100% Frontservice

Certification



Stand: 04/2025