


E0-8

Spec Sheet

960x960 mm

LIGHT WEIGHT
HIGH BRIGHTNESS
≥ 3.850HZ REFRESH
100% FRONT- AND BACKSERVICE

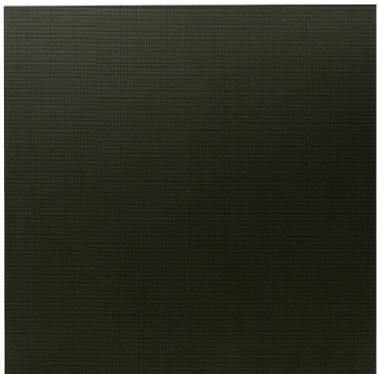

Pixelpitch	8,00 mm
Brightness	≥ 6.000 nits
Weight	23,1 kg
Power Consumption	Nominal 230 W max. 645 W
SMD-Type	SMD
SMD Specifications	High Brightness, High Contrast, High Level
Color Depth	Up to 14 Bit
Resolution	120 x 120 px
LED Driver	ICN2153S
Receivingcard	Novastar A5s
Scanmode	1/4
Refreshrate	≥ 3.840 Hz
Horiz. Angle of View	+140° -140°
Vert. Angle of View	+120° -120°
Contrast	> 5.000:1
Voltage Range	AC 210-240V 50-60 Hz
Connection	Seetronic
Dimensions (BxHxT)	960 x 960 x 104 mm
IP Rating	IP 65
Temperature Rating	-20°C to +50°C (In Operation) -40°C to +80°C (Storing)
Highlights	Light Weight, High Brightness, 100% Front- und Backservice

Certification

   EMC

Stand: 04/2025