
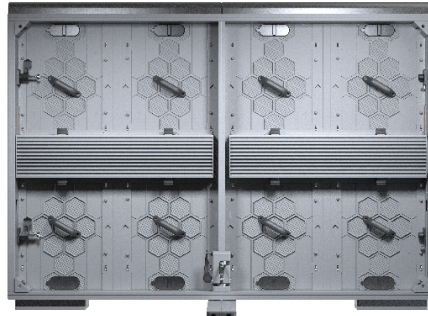


Sport i-6

Spec sheet

1.200 x 800 mm Perimetersystem

RUBBER SHADER
SOFTTOPPING
BOARD FOOT

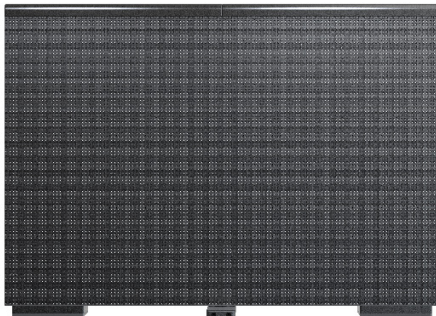

Pixelpitch	6,25 mm
Brightness	2.000 nit
Weight	32 kg
Power Consumption	Nominal 90 W max. 270 W
SMD-Type	SMD1921 CW
SMD Specifications	High-Brightness, High-Contrast
Color Depth	Up to 16 Bit
Resolution	192 x 128 px
LED Driver	ICND2153S
Receivingcard	Novastar A5s+
Scanmode	1/4
Refreshrate	≥ 3.840 Hz
Horiz. Angle of View	+140° -140°
Vert. Angle of View	+140° -140°
Contrast	> 3.100:1
Voltage Range	AC 110-220V 50/60 Hz
Connection	Seetronic
Dimensions (BxHxT)	1.200 x 800 mm T= 100 mm plus Board foot
IP Rating	IP40
Temperature Rating	-30°C to +50°C (In Operation) -20°C to +40°C (Storing)
Highlights	100% Front- und Backservice, tool-free replacement of IMs and backbox

Certification




 EMC

05/2024