


Sport o-6

Spec sheet

1.600 x 900 mm Perimetersystem

OPTIONAL EXTENSIONS:
RUBBER SHADER
EXIT-GATE
DRIVER CHIP ICND2153S
NEUTRIK CONNECTOR
SOFTTOPPING
BOARD FOOT

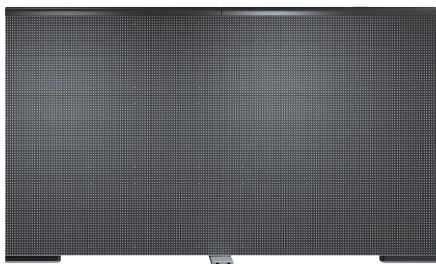

Pixelpitch	6,25 mm
Brightness	6.500 nit
Weight	48 kg
Power Consumption	Nominal 310 W max. 920 W
SMD-Type	SMD2727 GW
SMD Specifications	High-Brightness, High-Contrast
Color Depth	Up to 16 Bit
Resolution	256 x 144 px
LED Driver	ICND2153S
Receivingcard	Novastar A8S-N
Scanmode	1/4
Refreshrate	≥ 3.840 Hz
Horiz. Angle of View	+140° -140°
Vert. Angle of View	+120° -120°
Contrast	> 3.100:1
Voltage Range	AC 110-220V 50/60 Hz
Connection	Seetronic
Dimensions (BxHxT)	1.600 x 900 mm T= 100 mm zzgl. Bandenfuß
IP Rating	IP65 Front IP54 Back
Temperature Rating	-30°C to +50°C (In Operation) -20°C to +40°C (Storing)
Highlights	100% Front- und Backservice, tool-free replacement of IMs and backbox
Certification	   

Stand: 05/2024