

aR-10,4

Spec Sheet


500 x 1.000 mm

HIGH BRIGHTNESS

HIGH-CONTRAST

LIGHT WEIGHT

100% FRONT- AND BACKSERVICE

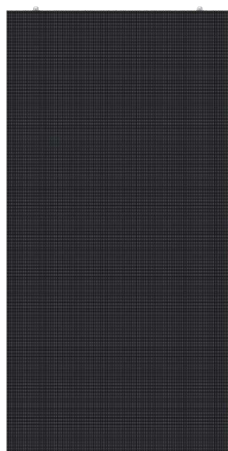

Pixelpitch	10,41 mm
Brightness	7.000 nit
Weight	14,5 kg
Power Consumption	Nominal 135 W max. 600 W
SMD-Type	SMD2727 3-in-1 GW
SMD Specifications	High-Brightness, High-Contrast, High-Level
Color Depth	Up to 14 Bit
Resolution	48 x 96 px
LED Driver	ICN2038S
Receivingcard	AT32
Scanmode	1/2
Refreshrate	≥ 1.920 Hz
Horiz. Angle of View	+140° -140°
Vert. Angle of View	+140° -140°
Contrast	> 4.000:1
Voltage Range	AC 110-220V 50 / 60 Hz
Connection	Seetronic TR1
Dimensions (BxHxT)	500 x 1.000 mm T= 74 mm
IP Rating	IP65 Front IP54 Back
Temperature Rating	-20°C to +50°C (In Operation) -20°C to +50°C (Storing)
Highlights	Light Weight, 100% Front- and Backservice
Certification	   