

# aR-10,4

## Spec Sheet


500 x 750 mm

HIGH BRIGHTNESS

HIGH-CONTRAST

LIGHT WEIGHT

100% FRONT- AND BACKSERVICE

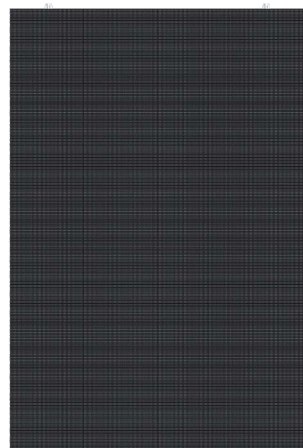

|                             |                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Pixelpitch</b>           | 10,41 mm                                                                                                                                                                                                                                                                                                                                                |
| <b>Brightness</b>           | 7.000 nit                                                                                                                                                                                                                                                                                                                                               |
| <b>Weight</b>               | 10 kg                                                                                                                                                                                                                                                                                                                                                   |
| <b>Power Consumption</b>    | Nominal 105 W   max. 400 W                                                                                                                                                                                                                                                                                                                              |
| <b>SMD-Type</b>             | SMD2727 3-in-1 GW                                                                                                                                                                                                                                                                                                                                       |
| <b>SMD Specifications</b>   | High-Brightness, High-Contrast, High-Level                                                                                                                                                                                                                                                                                                              |
| <b>Color Depth</b>          | Up to 14 Bit                                                                                                                                                                                                                                                                                                                                            |
| <b>Resolution</b>           | 48 x 72 px                                                                                                                                                                                                                                                                                                                                              |
| <b>LED Driver</b>           | ICN2038S                                                                                                                                                                                                                                                                                                                                                |
| <b>Receivingcard</b>        | AT32                                                                                                                                                                                                                                                                                                                                                    |
| <b>Scanmode</b>             | 1/2                                                                                                                                                                                                                                                                                                                                                     |
| <b>Refreshrate</b>          | ≥ 1.920 Hz                                                                                                                                                                                                                                                                                                                                              |
| <b>Horiz. Angle of View</b> | +140°   -140°                                                                                                                                                                                                                                                                                                                                           |
| <b>Vert. Angle of View</b>  | +140°   -140°                                                                                                                                                                                                                                                                                                                                           |
| <b>Contrast</b>             | > 4.000:1                                                                                                                                                                                                                                                                                                                                               |
| <b>Voltage Range</b>        | AC 110-220V   50 / 60 Hz                                                                                                                                                                                                                                                                                                                                |
| <b>Connection</b>           | Seetronic TR1                                                                                                                                                                                                                                                                                                                                           |
| <b>Dimensions (BxHxT)</b>   | 500 x 750 mm   T= 74 mm                                                                                                                                                                                                                                                                                                                                 |
| <b>IP Rating</b>            | IP65 Front   IP54 Back                                                                                                                                                                                                                                                                                                                                  |
| <b>Temperature Rating</b>   | -20°C to +50°C (In Operation)<br>-20°C to +50°C (Storing)                                                                                                                                                                                                                                                                                               |
| <b>Highlights</b>           | Light Weight, 100% Front- and Backservice                                                                                                                                                                                                                                                                                                               |
| <b>Certification</b>        |     |