

# aR-5,9

## Spec Sheet

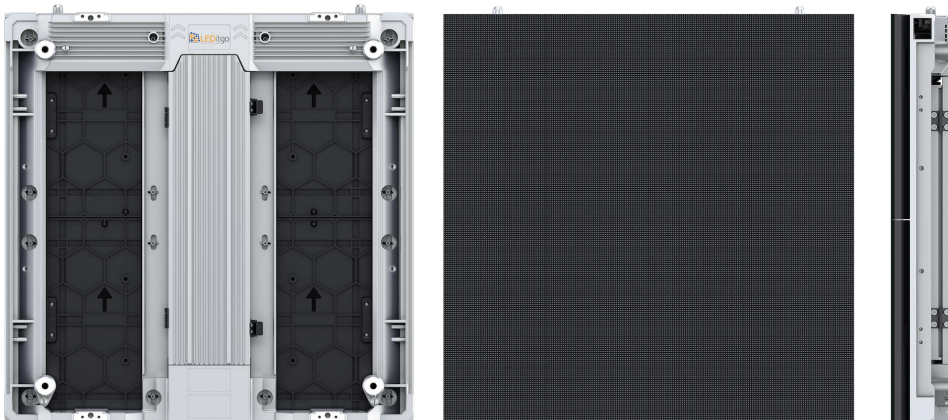
500 x 500 mm




HIGH BRIGHTNESS

HIGH-CONTRAST

LIGHT WEIGHT

100% FRONT- AND BACKSERVICE



<b>Pixelpitch</b>	5,95 mm
<b>Brightness</b>	5.000 nit
<b>Weight</b>	7,5 kg
<b>Power Consumption</b>	Nominal 70 W   max. 300 W
<b>SMD-Type</b>	SMD2727 3-in-1 GW
<b>SMD Specifications</b>	High-Brightness, High-Contrast, High-Level
<b>Color Depth</b>	Up to 14 Bit
<b>Resolution</b>	84 x 84 px
<b>LED Driver</b>	ICN2153
<b>Receivingcard</b>	AT32
<b>Scanmode</b>	1/6
<b>Refreshrate</b>	≥ 3.840 Hz
<b>Horiz. Angle of View</b>	+140°   -140°
<b>Vert. Angle of View</b>	+140°   -140°
<b>Contrast</b>	> 4.000:1
<b>Voltage Range</b>	AC 110-220V   50 / 60 Hz
<b>Connection</b>	Seetronic TR1
<b>Dimensions (BxHxT)</b>	500 x 500 mm   T= 74 mm
<b>IP Rating</b>	IP65 Front   IP54 Back
<b>Temperature Rating</b>	-20°C to +50°C (In Operation) -20°C to +50°C (Storing)
<b>Highlights</b>	Light Weight, 100% Front- and Backservice
<b>Certification</b>	   EMC