
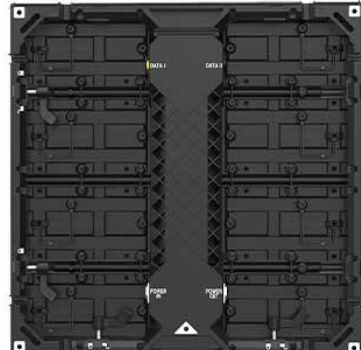


eX1,5T

Spec sheet

500 x 500 mm

NOVASTAR A8S-N RECEIVINGCARD
QUICK-LOCK-SYSTEM
MAGNETIC FAST-RIGG
100% FRONTSERVICE

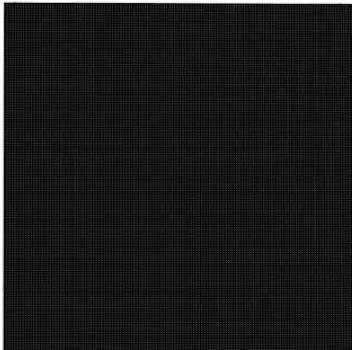

Pixelpitch	1,50 mm
Brightness	1.000 nit
Weight	5,6 kg
Power Consumption	Nominal 34 W max. 140 W
SMD-Type	Nationstar 1212
SMD Specifications	High-Level, Black-Face
Color Depth	14 Bit
Resolution	320 x 320 px
LED Driver	MBI5264
Receivingcard	Novastar A8s-N
Scanmode	1/40
Refreshrate	≥ 3.840 Hz
Horiz. Angle of View	+160° -160°
Vert. Angle of View	+140° -140°
Contrast	> 6.500:1
Voltage Range	AC 100-240V 50 Hz
Connection	Seetronic
Dimensions (BxHxT)	500 x 500 mm T = 40 mm
IP Rating	IP 40 (Front & Back)
Temperature Rating	-15°C to +40°C (In Operation) -20°C to +45°C (Storing)
Highlights	Quick-Lock-System, Magnetic Fast-Rigg 100% Frontservice

Certification

UL CE  RoHS EMC