
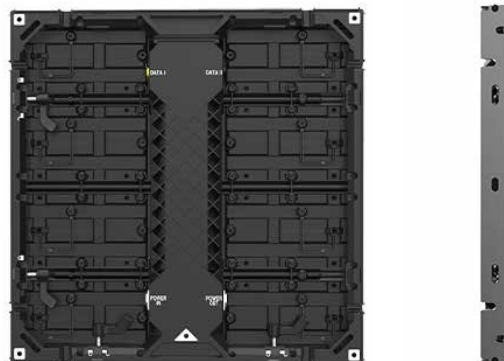


eX1,9T

Spec sheet

500 x 500 mm

NOVASTAR A8S-N RECEIVINGCARD
QUICK-LOCK-SYSTEM
MAGNETIC FAST-RIGG
100% FRONTSERVICE

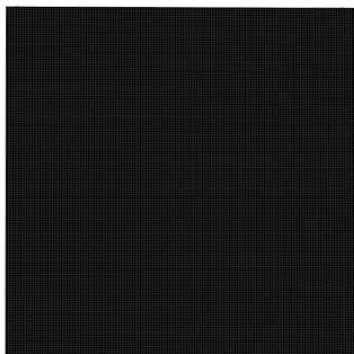

Pixelpitch	1,90 mm
Brightness	1.000 nit
Weight	5,6 kg
Power Consumption	Nominal 34 W max. 140 W
SMD-Type	Nationstar CW 1515 High-
SMD Specifications	Level, Black-Face
Color Depth	14 Bit
Resolution	256 x 256 px
LED Driver	MBI5253
Receivingcard	Novastar A8s-N
Scanmode	1/32
Refreshrate	≥ 2.880 Hz
Horiz. Angle of View	+160° -160°
Vert. Angle of View	+140° -140°
Contrast	> 5.400:1
Voltage Range	AC 100-240V 50 Hz
Connection	Seetronic
Dimensions (BxHxT)	500 x 500 mm T=40 mm
IP Rating	IP 40 (Front & Back)
Temperature Rating	-15°C to +40°C (In Operation) -20°C to +45°C (Storing)
Highlights	Quick-Lock-System, Magnetic Fast-Rigg 100% Frontservice

Certification

UL CE  RoHS EMC

Stand: 06/2023