
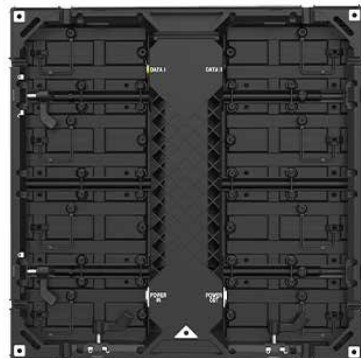


eX2+E

Spec sheet

500 x 500 mm

NOVASTAR A5S+ RECEIVINGCARD
 QUICK-LOCK-SYSTEM
 MAGNETIC FAST-RIGG
 100% FRONTSERVICE

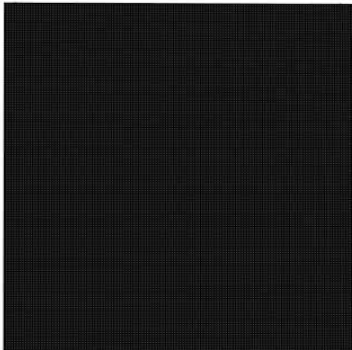

Pixelpitch	2,60 mm
Brightness	1.100 nit
Weight	5,4 kg
Power Consumption	Nominal 34 W max. 150 W
SMD-Type	Sinyopto CW 1515
SMD Specifications	High-Level, Black-Face
Color Depth	14 Bit
Resolution	192 x 192 px
LED Driver	ICND213S
Receivingcard	Novastar A5s+
Scanmode	1/24
Refreshrate	≥ 3.840 Hz
Horiz. Angle of View	+160° -160°
Vert. Angle of View	+140° -140°
Contrast	> 7.600:1
Voltage Range	AC 100-240V 50 Hz
Connection	Seetronic
Dimensions (BxHxT)	500 x 500 mm T=40 mm
IP Rating	IP 40 (Front & Back)
Temperature Rating	-15°C to +40°C (In Operation) -20°C to +45°C (Storing)
Highlights	Quick-Lock-System, Magnetic Fast-Rigg 100% Frontservice

Certification




 EMC