
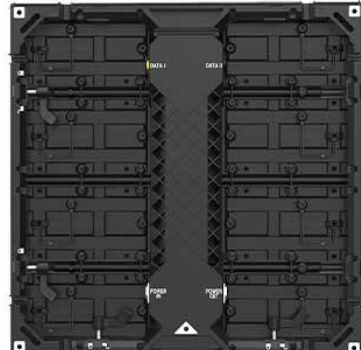


eX3E

Spec sheet

500 x 500 mm

NOVASTAR A5S+ RECEIVINGCARD
QUICK-LOCK-SYSTEM
MAGNETIC FAST-RIGG
100% FRONTSERVICE

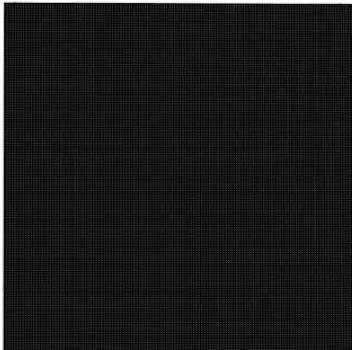

Pixelpitch	3,90 mm
Brightness	1.200 nit
Weight	5,4 kg
Power Consumption	Nominal 34 W max. 150 W Sinyopto CW 2020
SMD-Type	High-Level, Black-Face
SMD Specifications	14 Bit
Color Depth	128 x 128 px
Resolution	ICND2153S
LED Driver	Novastar A5s+
Receivingcard	1/16
Scanmode	≥ 3.840 Hz
Refreshrate	+140° -140°
Horiz. Angle of View	+140° -140°
Vert. Angle of View	> 7.800:1
Contrast	AC 100-240V 50 Hz
Voltage Range	Seetronic
Connection	500 x 500 mm T=40 mm
Dimensions (BxHxT)	IP 40 (Front & Back)
IP Rating	-15°C to +40°C (In Operation)
Temperature Rating	-20°C to +45°C (Stpring)
Highlights	Quick-Lock-System, Magnetic Fast-Rigg 100% Frontservice

Certification

UL CE  RoHS EMC