
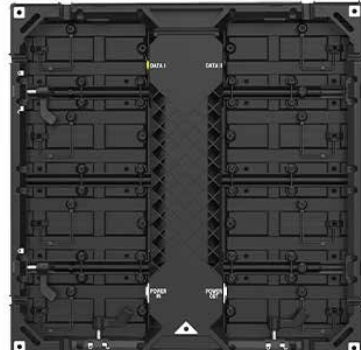


eX3T

Spec sheet

500 x 500 mm

NOVASTAR A5S+ RECEIVINGCARD
 QUICK-LOCK-SYSTEM
 MAGNETIC FAST-RIGG
 100% FRONTSERVICE

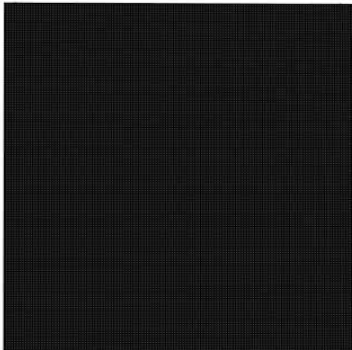

Pixelpitch	3,90 mm
Brightness	1.200 nit
Weight	5,4 kg
Power Consumption	Nominal 34 W max. 150 W
SMD-Type	Nationstar CW 2020
SMD Specifications	High-Level, Black-Face
Color Depth	14 Bit
Resolution	128 x 128 px
LED Driver	MBI5253
Receivingcard	Novastar A5s+
Scanmode	1/16
Refreshrate	≥ 3.840 Hz
Horiz. Angle of View	+140° -140°
Vert. Angle of View	+140° -140°
Contrast	> 7.800:1
Voltage Range	AC 100-240V 50 Hz
Connection	Seetronic
Dimensions (BxHxT)	500 x 500 mm T=40 mm
IP Rating	IP 40 (Front & Back)
Temperature Rating	-15°C to +40°C (In Operation) -20°C to +45°C (Storage)
Highlights	Quick-Lock-System, Magnetic Fast-Rigg 100% Frontservice

Certification




 EMC