


RA155ix

Spec Sheet

496 x 496 mm

NOVASTAR A10S PRO RECEIVINGCARD
URT TECHNOLOGY
QUICK-LOCK-SYSTEM
MAGNETIC FAST-RIGG
CURVING UP TO 10° IN 2,5° STEPS

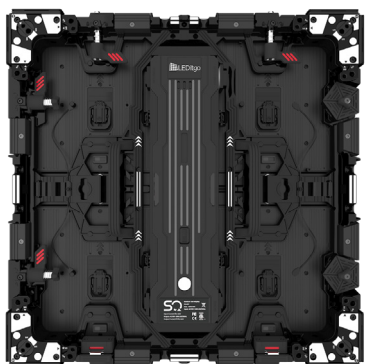

Pixelpitch	1,55 mm
Brightness	≥ 800 - 1.000 nits
Weight	8,5 kg
Power Consumption	Nominal 48 W max. 200 W
SMD-Type	GOB
SMD Specifications	High-Level, Black-Face
Color Depth	22 Bit
Resolution	320 x 320 px
LED Driver	CFD955
Receivingcard	Novastar A10s Pro
Scanmode	1/32
Refreshrate	≥ 3.840 Hz
Horiz. Angle of View	+160° -160°
Vert. Angle of View	+160° -160°
Contrast	> 6.000:1
Voltage Range	AC 100-240V 50 Hz
Connection	Seetronic TR1
Dimensions (BxHxT)	496 x 496 x 55 mm
IP Rating	IP 40
Temperature Rating	-15°C to +40°C (In Operation) -20°C to +45°C (Storing)
Highlights	Quick-Lock-System, Magnetic Fast-Rigg, 100% Frontservice, Curving up to 10° concave in 2,5° steps
Certification	UL CE RoHS EMC